

11W

UGR<16

86°



20W




Specifications


Product model	BL-TL11W-01A	BL-TL20W-01A
Input power	11W	20W
Light output	1,375 lm	2,500 lm
Efficacy	125 lm/W	125 lm/W
LED lamp	2835	2835
CCT	3000K, 4000K, 5000K, 6000K	3000K, 4000K, 5000K, 6000K
CRI	80	80
Beam angle	86	86
Optical cover	PC lens	PC lens
UGR	<16	<16
LED driver	Meanwell	Meanwell
Input voltage	100-277V AC, 50/60Hz	100-277V AC, 50/60Hz
Functions	0-10V, DALI, Emergency, Occupancy sensing	0-10V, DALI, Emergency, Occupancy sensing
IP Rating	IP20	IP20
Lifetime	50,000 hrs	50,000 hrs

Dimensions (mm)

11W (295*295)



20W (595*295)

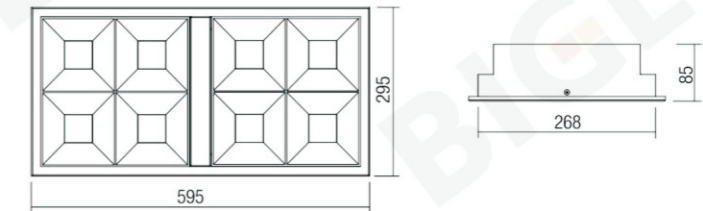


Product Features

- Ideal for office lighting, visual comfort can be guaranteed.
- Energy efficient, low maintenance costs.
- Up to 125 lm/W.
- Low glare design, UGR<16.
- Luminaire lifetime up to 50000 hours, lumen maintenance >97%.
- Optional function: 0-10V or DALI dimmable, emergency or occupancy sensing.
- Easy installation, recessed / suspended / surface mounted.

Applications




Product Highlights

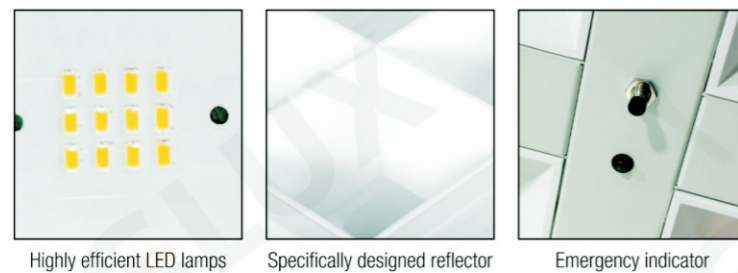

Photometrics

11W / 86°

86°




	Center Beam lux	Beam Width
1m	833.41 lux	1.7m 1.7m
2m	208.35 lux	3.4m 3.4m
3m	92.60 lux	5.1m 5.1m
4m	52.09 lux	6.8m 6.8m
5m	33.34 lux	8.6m 8.5m
6m	23.15 lux	10.3m 10.2m

Vertical: 81.1° Horizontal: 80.8°

20W / 86°

86°



	Center Beam lux	Beam Width
1m	1,424.72 lux	1.7m 1.7m
2m	356.18 lux	3.4m 3.4m
3m	158.30 lux	5.1m 5.1m
4m	89.04 lux	6.8m 6.8m
5m	56.99 lux	8.5m 8.5m
6m	39.58 lux	10.2m 10.2m

Vertical: 80.9° Horizontal: 80.9°